

BRaMMS-Solo - 698/XXX



BRaMMS - Solo - 698/100

- from 10mW to 300mW output power at 698nm SLM
- feedback locked Single Longitudinal Mode CW operation
- mode hops and lock loss free
- very low noise performance
- excellent beam quality from smallest footprint
- lowest power consumption for given output


Units

Output Beam Parameters:		
Output Power (fixed values within range)	mW	10 - 300
Power Control (optional)	—	Externally via manual power adjuster (MPA)
Wavelength	nm	697.8 ± 0.2
Beam Spatial Mode	—	TEM ₀₀
Beam Diameter at output aperture	mm	0.8 ± 0.1
Beam Divergence	mrad	< 1, diffraction limited
Beam Pointing Stability	μrad/°C	≤ 5
Longitudinal Mode Structure	—	SLM
Line Width	MHz	< 0.5
Line Spectral Position Stability (±5 °C, 4 hours)	pm	±1.7
Coherence Length	m	> 100
Mode Hops Free Fine Tuning Range (optional)	GHz	25 - 30
Polarisation	—	Linear, Vertical; ≥100:1
Output Power Noise (10Hz - 10MHz)	%	≤ 0.1rms, ≤ 1p-p
Output Power Stability (4 hours, ±5 °C)	%	≤2
Environmental:		
Working Temperatures	°C	15 - 35, conductive cooling via mounting interface
Storage Temperatures	°C	-20 to 60
Humidity	%	5 -95, non-condensing
Warm up time	min	<15
Dimensions and Electrical:		
Supply Voltage	DC	19
Power Consumption (at 25 °C)	W	<60

*Fixed output power turnkey system, CW operation, factory aligned and sealed.
Specification may be subject to change without notice.*


BRaMMS-Solo - 698/XXX Laser Head and Controller Dimensional Specification

Laser Head: 80x 65x 170mm

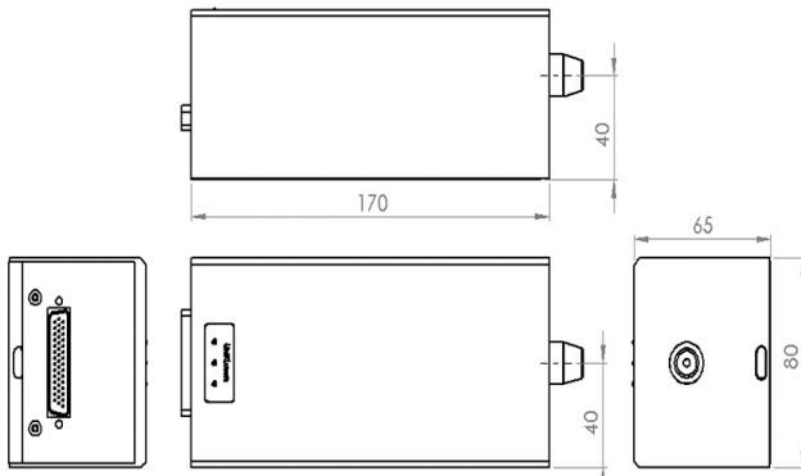

Controller

170x 53.5x 163mm

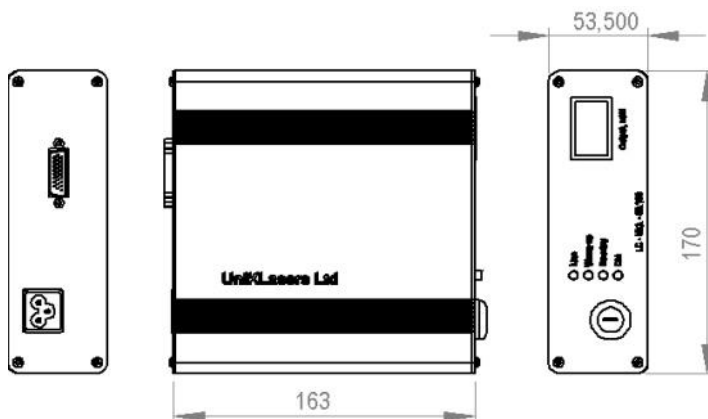

sales@uniklasers.com

www.uniklasers.com